



# Small goods lifts MH


## Goods lifts


Very useful and easy to transport items such as food, parcels, documents, etc... Due to the particular use to which these lifts are intended, they are installed mainly in restaurants, hotels, libraries, offices or hospitals.


The installation is relatively simple, for this it is necessary to have a space reserved for the installation of said device. To facilitate its use, save time and money, the installation on site have direct connection to the electrical grid to be used as a normal household appliance as there may be in your kitchen or living room.

 50 - 100 kg

 At 180°, 90° and 0°


 Maximum travel 15 m

 Hydraulic

 Speed 0,40 m/s

### Basic configuration

- Car height: 800 mm
- Engine in the pit and controller in car or motor and controller on the shaft side.
- Electrical pre-wired controller to 24V.
- Guillotine type doors in AISI-304 stainless steel sheet, 500 x 800 mm. (50kg). And 700 x 800 mm. (100 kg).
- Possibility of up to three stops.
- Overpressure safety valve (hydraulic version).
- Safety contact at the end of the travel.
- Rupture valve.
- Door locks and pre-locks.
- Car in stainless steel.
- 1 Intermediate tray.

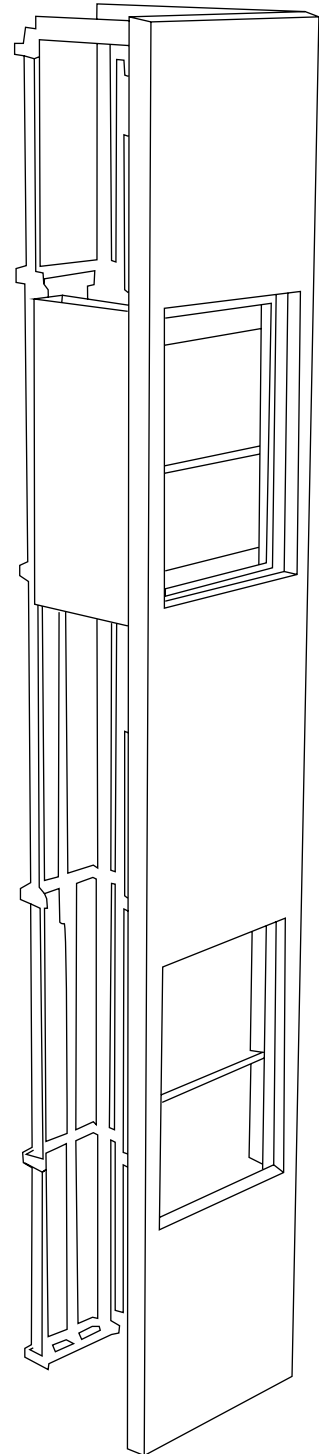





# Small goods lifts MH

## Layouts and drawing

### Plan view

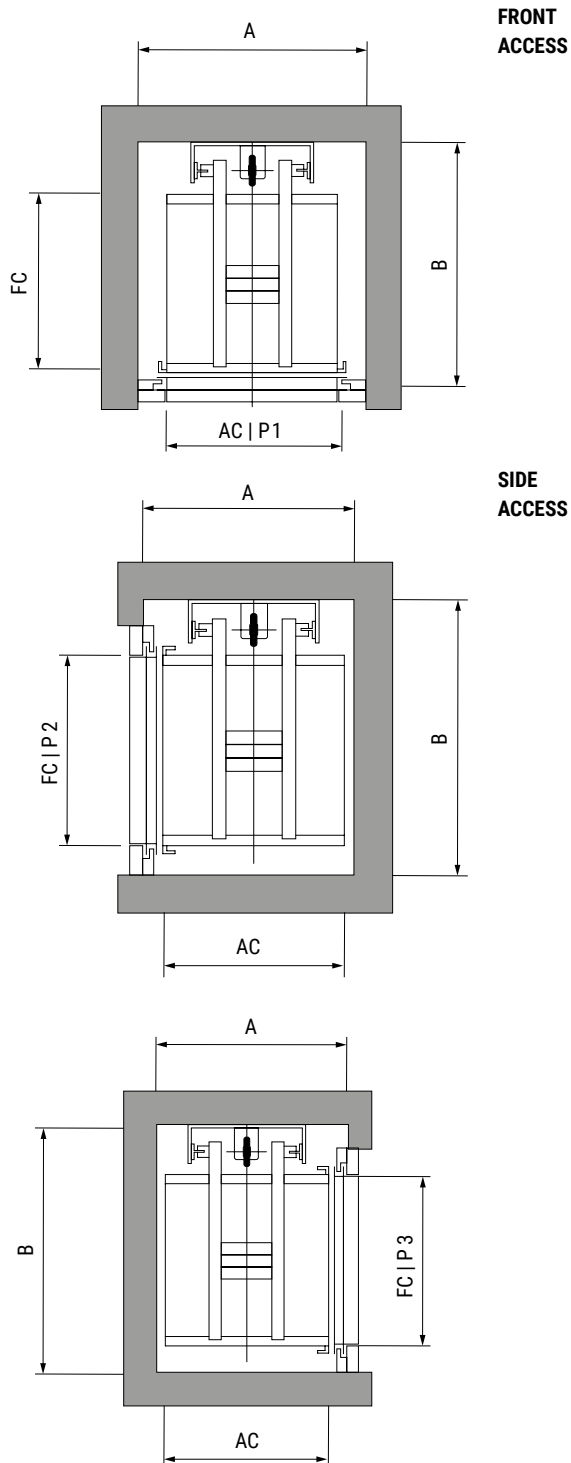



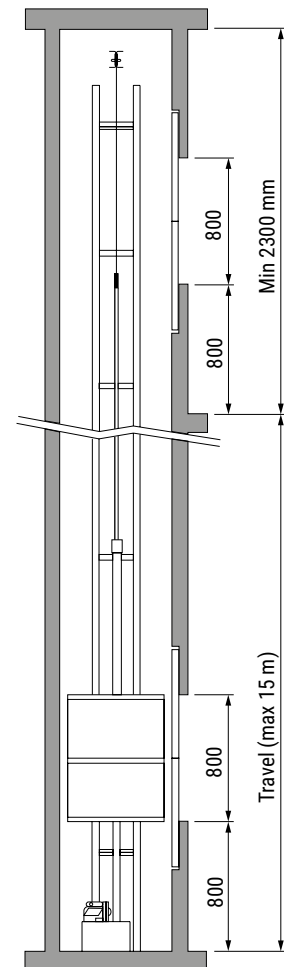










### Height



<b>AC</b>	Car width
<b>FC</b>	Car depth
<b>P1</b>	Door 1
<b>P2</b>	Door 2
<b>P3</b>	Door 3
<b>A</b>	Pit Width
<b>B</b>	Pit depth


## Small goods lifts MH

REFERENCE	Characteristics				Doors			Car		Without structure		With structure	
	Q Kg	T kW	M kW	V m/s	P1 mm	P2 mm	P3 mm	AC mm	FC mm	A mm	B mm	A mm	B mm
													
<b>FRONT</b>	50	0,37	0,55	0,40	500	-	-	500	500	660	705	785	785
<b>ACCESS</b>	100	1,10	1,10	0,40	500	-	-	500	500	660	705	785	785
	50	0,37	0,55	0,40	600	-	-	600	600	760	805	885	885
	100	1,10	1,10	0,40	600	-	-	600	600	760	805	885	885
	50	0,37	0,55	0,40	650	-	-	650	650	810	855	935	935
	100	1,10	1,10	0,40	650	-	-	650	650	810	855	935	935
	50	0,37	0,55	0,40	700	-	-	700	700	860	905	985	985
	100	1,10	1,10	0,40	700	-	-	700	700	860	905	985	985
<b>SIDE</b>	50	0,37	0,55	0,40	-	500	500	500	500	585	730	690	835
<b>ACCESS</b>	100	1,10	1,10	0,40	-	500	500	500	500	585	730	690	835
	50	0,37	0,55	0,40	-	600	600	600	600	685	830	790	935
	100	1,10	1,10	0,40	-	600	600	600	600	685	830	790	935
	50	0,37	0,55	0,40	-	650	650	650	650	735	880	840	985
	100	1,10	1,10	0,40	-	650	650	650	650	735	880	840	985
	50	0,37	0,55	0,40	-	700	700	700	700	785	930	890	1035
	100	1,10	1,10	0,40	-	700	700	700	700	785	930	890	1035
	<b>Q</b> Loading capacity <b>M</b> Single phase power <b>T</b> Three-phase power <b>V</b> Speed				<b>P1</b> Door 1 <b>P2</b> Door 2 <b>P3</b> Door 3			<b>AC</b> Car width <b>FC</b> Car depth		<b>A</b> Pit width <b>B</b> Pit depth		<b>A</b> Pit width <b>B</b> Pit depth	
-In the side door model it is possible to choose the location of the door between P2 or between P3, never both in this model. -Dimensions for standard car. -If the pit measurements of your small goods lift do not correspond to that of the standard measurements, consult our sales team. -Model of 1 access.													



# Small goods lifts MH

## Layouts and drawing


### Plan view



**DOUBLE CAR  
ACCESSES  
AT 90**




**DOUBLE CAR  
ACCESSES  
AT 180**

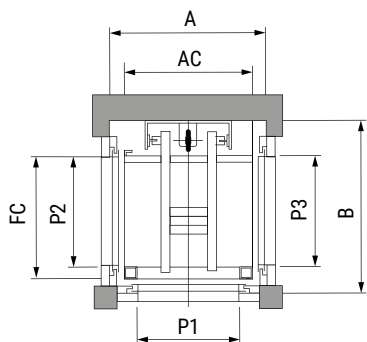





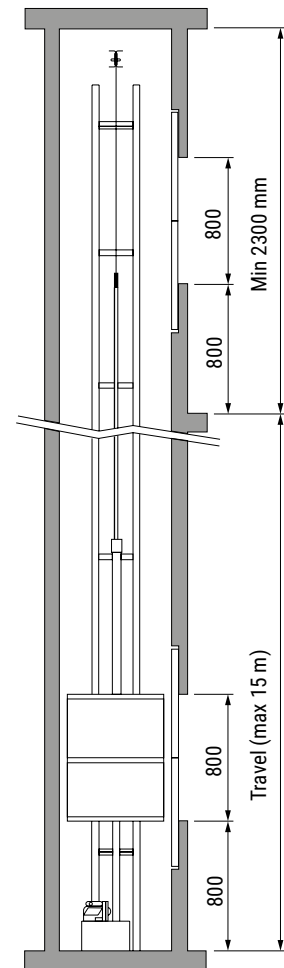








**TRIPLE CAR  
ACCESSES**

### Height



<b>AC</b>	Car width
<b>FC</b>	Car depth
<b>P1</b>	Door 1
<b>P2</b>	Door 2
<b>P3</b>	Door 3
<b>A</b>	Pit Width
<b>B</b>	Pit depth

REFERENCE	Characteristics				Doors			Car		Without structure		With structure	
	Q Kg	T kW	M kW	V m/s	P1 mm	P2 mm	P3 mm	AC mm	FC mm	A mm	B mm	A mm	B mm
													
<b>DOUBLE CAR</b>	50	0,37	0,55	0,40	450	450	450	500	500	635	705	735	785
<b>ACCESSES</b>	100	1,10	1,10	0,40	450	450	450	500	500	635	705	735	785
<b>AT 90</b>	50	0,37	0,55	0,40	550	550	550	600	600	735	805	835	885
	100	1,10	1,10	0,40	550	550	550	600	600	735	805	835	885
	50	0,37	0,55	0,40	600	600	600	650	650	785	855	885	935
	100	1,10	1,10	0,40	600	600	600	650	650	785	855	885	935
	50	0,37	0,55	0,40	650	650	650	700	700	835	905	935	985
	100	1,10	1,10	0,40	650	650	650	700	700	835	905	935	985
<b>DOUBLE CAR</b>	50	0,37	0,55	0,40	-	500	500	500	500	610	730	690	835
<b>ACCESSES</b>	100	1,10	1,10	0,40	-	500	500	500	500	610	730	690	835
<b>AT 180</b>	50	0,37	0,55	0,40	-	600	600	600	600	710	830	790	935
	100	1,10	1,10	0,40	-	600	600	600	600	710	830	790	935
	50	0,37	0,55	0,40	-	650	650	650	650	760	880	840	985
	100	1,10	1,10	0,40	-	650	650	650	650	760	880	840	985
	50	0,37	0,55	0,40	-	700	700	700	700	810	930	890	1035
	100	1,10	1,10	0,40	-	700	700	700	700	810	930	890	1035
<b>TRIPLE CAR</b>	50	0,37	0,55	0,40	400	450	450	500	500	610	705	690	785
<b>ACCESSES</b>	100	1,10	1,10	0,40	400	450	450	500	500	610	705	690	785
	50	0,37	0,55	0,40	500	550	550	600	600	710	805	790	885
	100	1,10	1,10	0,40	500	550	550	600	600	710	805	790	885
	50	0,37	0,55	0,40	550	600	600	650	650	760	855	840	935
	100	1,10	1,10	0,40	550	600	600	650	650	760	855	840	935
	50	0,37	0,55	0,40	600	650	650	700	700	810	905	890	985
	100	1,10	1,10	0,40	600	650	650	700	700	810	905	890	985

**Q** Loading capacity  
**M** Single phase power  
**T** Three-phase power  
**V** Speed

**P1** Door 1  
**P2** Door 2  
**P3** Door 3

**AC** Car width  
**FC** Car depth

**A** Pit width  
**B** Pit depth

**A** Pit width  
**B** Pit depth

-Dimensions for standard car.  
 -If the pit measurements of your small goods lift do not correspond to that of the standard measurements, consult our sales team.  
 -Model of 2 or 3 doors.