








Machine room-less

Lifts


This model has an electric motor which has very low energy consumption while still running smoothly.

When it comes to high capacity lifts, they are mainly used for public buildings.


- | | |
|---|---|
|  750 - 3000 kg |  At 180° and 0° |
|  10 - 40 persons |  Electric |
|  Maximum travel 45 m |  Speed 1 - 1,6 m/s |

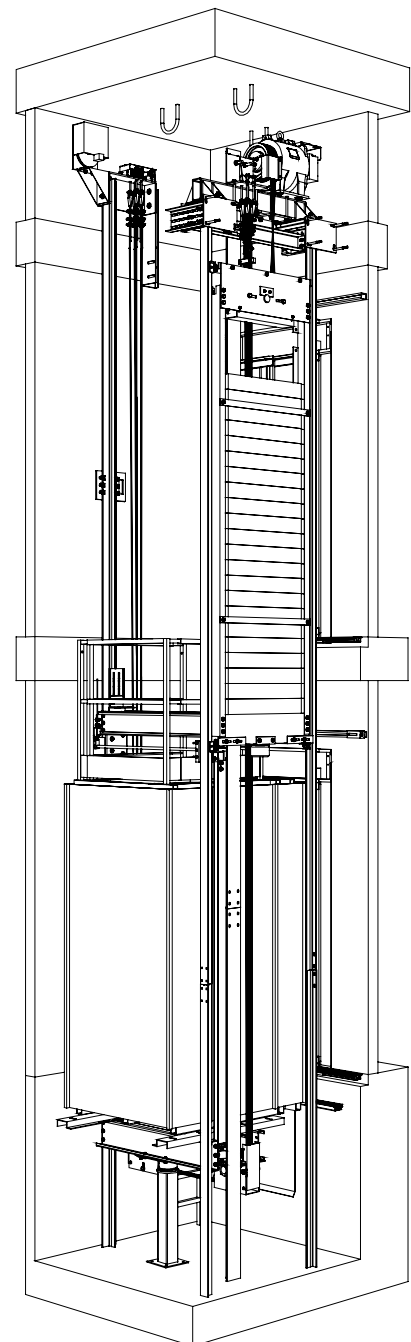

E_1SCMi



E_2SCMi






Basic configuration

- Car doors in epoxy.
- Car door in stainless steel.
- Skinplate car. Z1 car
- Selective simplex on descent.
- Manual rescue control.
- Stainless steel car keypad with round buttons and with BRAILLE.
- Landing keypad in the steel door frame stainless with oval or round button and with BRAILLE.
- Digital position, directional arrows and load weighing in the car.
- Intercom.
- Acoustic indicator of doors opening.
- Voice synthesizer.
- Optical curtain. (Safety edge)


E_1SCMi

Layouts and drawing



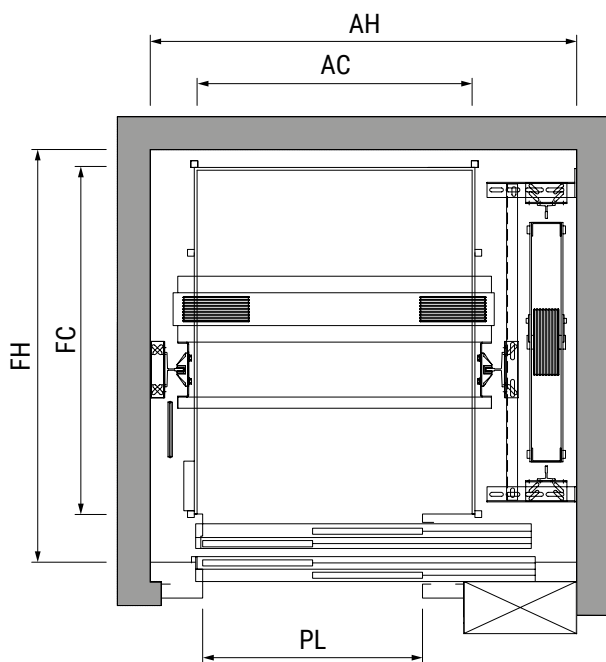



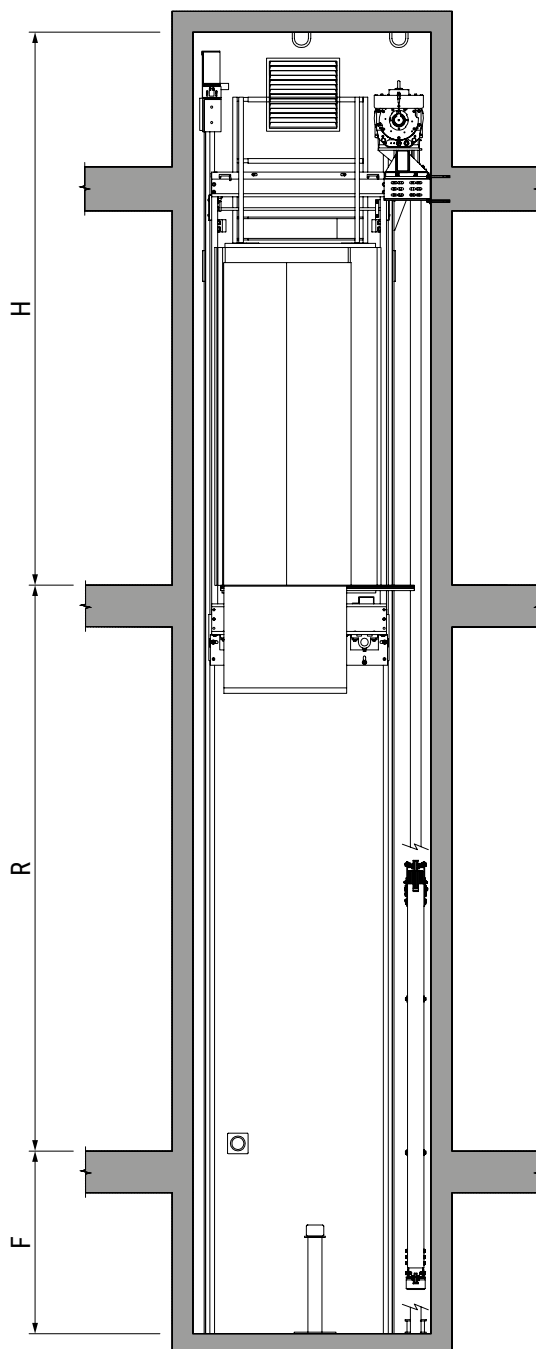







Plan view



Height



PL	Door opening
AC	Car width
FC	Car depth
AH	Pit width
FH	Pit depth
R	Travel
H	Headroom
F	Pit

REFERENCE	Characteristics				Doors			Car			Pit			
	Q Kg	P	V m/s	PT kW	T	PL mm	AP mm	AC mm	FC mm	A mm	AH mm	FH mm	F mm	H mm
														
E101SCMi	750	10	1 - 1,6	5,04	2T	900	2000	1200	1500	2150	1800	1750	1100	3600
	750	10	1 - 1,6	5,04	2C	900	2000	1200	1500	2150	1950	1720	1100	3600
E111SCMi	825	11	1 - 1,6	5,83	2T	900	2000	1300	1500	2150	1900	1750	1100	3600
	825	11	1 - 1,6	5,83	2C	900	2000	1300	1500	2150	1950	1720	1100	3600
E121SCMi	900	12	1 - 1,6	6,64	2T	900	2000	1400	1500	2150	2000	1750	1100	3800
	900	12	1 - 1,6	6,64	2C	900	2000	1400	1500	2150	2000	1720	1100	3800
E131SCMi	1000	13	1 - 1,6	7,14	2T	900	2000	1100	2100	2150	1780	2350	1100	3600
	1000	13	1 - 1,6	7,14	2C	900	2000	1100	2100	2150	1950	2320	1100	3600
E141SCMi	1050	14	1 - 1,6	7,61	2T	1000	2000	1100	2200	2150	1780	2450	1100	3800
	1050	14	1 - 1,6	7,61	2C	1000	2000	1100	2200	2150	1950	2420	1100	3800
E151SCMi	1125	15	1 - 1,6	7,75	2T	1000	2000	1500	1700	2150	2180	1970	1100	3800
	1125	15	1 - 1,6	7,75	2C	1000	2000	1500	1700	2150	2180	1940	1100	3800
E161SCMi	1200	16	1 - 1,6	9,69	2T	1000	2000	1200	2200	2150	1880	2470	1100	3800
	1200	16	1 - 1,6	9,69	2C	1000	2000	1200	2200	2150	2150	2440	1100	3800
E201SCMi	1500	20	1 - 1,6	11	2T	1100	2000	1400	2400	2150	2150	2670	1200	4200
	1500	20	1 - 1,6	11	2C	1100	2000	1400	2400	2150	2400	2640	1200	4200
E211SCMi	1575	21	1 - 1,6	11	2T	1100	2000	1400	2500	2150	2150	2770	1200	4200
	1575	21	1 - 1,6	11	2C	1100	2000	1400	2500	2150	2400	2740	1200	4200
E261SCMi	1950	26	1 - 1,6	13,86	2T	1200	2000	1600	2500	2150	2400	2770	1200	4400
	1950	26	1 - 1,6	13,86	2C	1200	2000	1600	2500	2150	2600	2740	1200	4400
E401SCM	3000	40	1 - 1,6	19,44	2T	1500	2000	2500	2900	2150	3450	3180	1300	4800

PT Power

Q Loading capacity

P Max. n° of people

V Speed

PL Doors opening

AP Height of doors

2C 2 Panel side openings

2T 2 P. central openings

SB Semi-automatic + bus

T Type of door

AC Car width

FC Car depth

A Height

AH Pit width

FH Pit depth

F Pit

H Headroom

-Dimensions for standard cars and skinplate decoration with porcelain floor.


-If the dimensions of your lift and car do not correspond to that of the standard measurements consult our sales team.

-1 entrance car.


E_2SCMi

Layouts and drawing



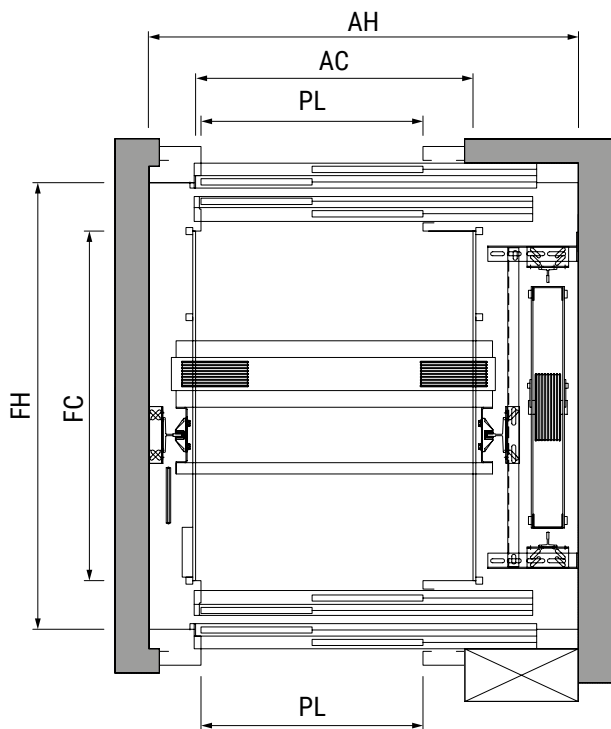



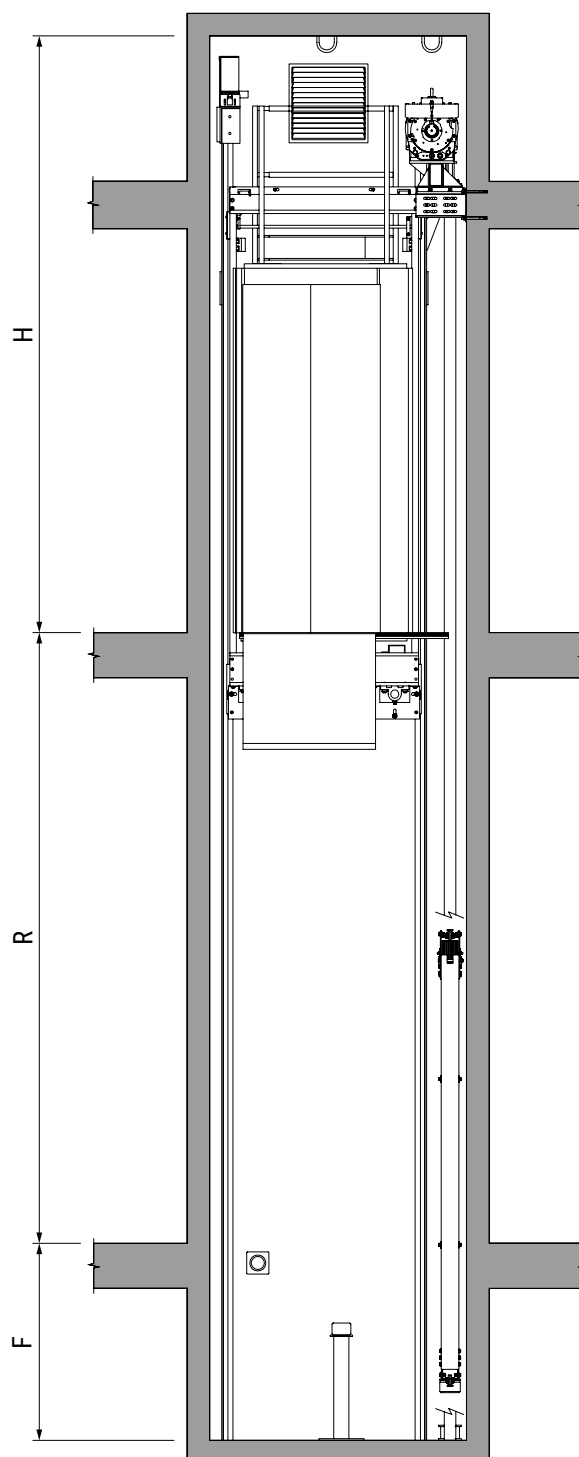







Plan view



Height



PL	Door opening
AC	Car width
FC	Car depth
AH	Pit width
FH	Pit depth
R	Travel
H	Headroom
F	Pit

REFERENCE	Characteristics				Doors			Car			Pit			
	Q Kg	P	V m/s	PT kW	T	PL mm	AP mm	AC mm	FC mm	A mm	AH mm	FH mm	F mm	H mm
														
E102SCMi	750	10	1 - 1,6	5,8	2T	900	2000	1200	1500	2150	1800	1860	1100	3600
	750	10	1 - 1,6	5,8	2C	900	2000	1200	1500	2150	1950	1790	1100	3600
E112SCMi	825	11	1 - 1,6	5,83	2T	900	2000	1300	1500	2150	1900	1860	1100	3600
	825	11	1 - 1,6	5,83	2C	900	2000	1300	1500	2150	1950	1790	1100	3600
E122SCMi	900	12	1 - 1,6	8,4	2T	900	2000	1400	1500	2150	2000	1860	1100	3800
	900	12	1 - 1,6	8,4	2C	900	2000	1400	1500	2150	2000	1790	1100	3800
E132SCMi	1000	13	1 - 1,6	7,14	2T	900	2000	1100	2100	2150	1780	2460	1100	3600
	1000	13	1 - 1,6	7,14	2C	900	2000	1100	2100	2150	1950	2390	1100	3600
E142SCMi	1050	14	1 - 1,6	7,61	2T	1000	2000	1100	2200	2150	1780	2560	1100	3800
	1050	14	1 - 1,6	7,61	2C	1000	2000	1100	2200	2150	1950	2490	1100	3800
E152SCMi	1125	15	1 - 1,6	7,75	2T	1000	2000	1500	1700	2150	2180	2080	1100	3800
	1125	15	1 - 1,6	7,75	2C	1000	2000	1500	1700	2150	2180	2010	1100	3800
E162SCMi	1200	16	1 - 1,6	9,69	2T	1000	2000	1200	2200	2150	1880	2580	1100	3800
	1200	16	1 - 1,6	9,69	2C	1000	2000	1200	2200	2150	2150	2510	1100	3800
E202SCMi	1500	20	1 - 1,6	11	2T	1100	2000	1400	2400	2150	2150	2780	1200	4200
	1500	20	1 - 1,6	11	2C	1100	2000	1400	2400	2150	2400	2710	1200	4200
E212SCMi	1575	21	1 - 1,6	11	2T	1100	2000	1400	2400	2150	2150	2880	1200	4200
	1575	21	1 - 1,6	11	2C	1100	2000	1400	2400	2150	2400	2810	1200	4200
E262SCMi	1950	26	1 - 1,6	13,86	2T	1200	2000	1600	2500	2150	2400	2880	1200	4400
	1950	26	1 - 1,6	13,86	2C	1200	2000	1600	2500	2150	2600	2810	1200	4400
E402SCM	3000	40	1 - 1,6	19,44	2T	1500	2000	2500	2900	2150	3450	3260	1300	4800

PT Power

Q Loading capacity

P Max. n° of people

V Speed

PL Doors opening

AP Height of doors

2C 2 Panel side openings

2T 2 P. central openings

SB Semi-automatic + bus

T Type of door

AC Car width

FC Car depth

A Height

AH Pit width

FH Pit depth

F Pit

H Headroom

-Dimensions for standard cars and skinplate decoration with porcelain floor.

-If the dimensions of your lift and car do not correspond to that of the standard measurements consult our sales team.

-2 entrance car.